


RT250

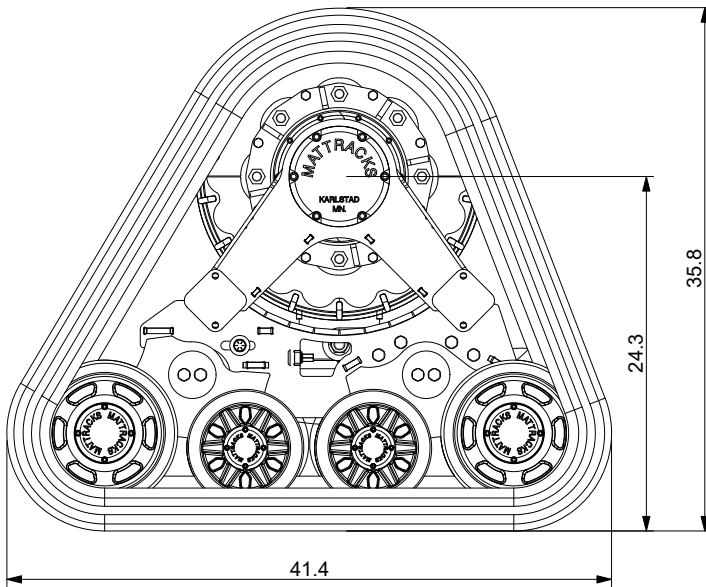

CORNERS	4
EXCLUSIVE ANTI-TORQUE SYSTEM	Rubber Torsion
FRAME CONSTRUCTION	Steel
RECOMMENDED MAX GROSS	25,000 lbs
ASSEMBLY WEIGHT	2,500 lbs
INTERNAL SUSPENSION	Concentric Pivot w/ Independent Rubber Torsion Rockers
TRACK TREAD WIDTH	15 in
TREAD STYLE	All-Terrain, Self-Cleaning
TRACK MATERIAL	Rubber with Heavy Duty Internal Rods and Cord
RECOMMENDED OPERATING TEMPERATURE	(Ambient) -40° to +130°
AXLE HEIGHT	24.25 in
GROUND CONTACT LENGTH PER CORNER	(Hard Surface) - 28 in min (Soft Surface) - 41.38 in max
GROUND CONTACT SURFACE AREA	(Hard Surface) - 1,680 in ² min (Soft Surface) - 2,482 in ² max
SPROCKET DIAMETER	20 in
WHEELS (SHIELDED & SEALED BEARING) PER CORNER	(6) 2.5"x8", (6) 2.5"x10" Heavy Duty, Industrial Seals (12/corner, 3 rows)
RECOMMENDED MAX SPEED**	15 mph
TURNING RADIUS	Same as original vehicle
MAX OPERATING SIDE SLOPE (GRADE)*	25%
TERRAIN	All-Terrain Including Hard Surface at GVW

*DEPENDING ON VEHICLE, CARGO, AND ACCESSORIES **SOME VEHICLES MAY REQUIRE SLIGHT ALTERATIONS
ALL SPECIFICATIONS ARE APPROXIMATE AND WE RESERVE THE RIGHT TO MAKE CHANGES OR MODIFICATIONS WITHOUT NOTIFICATION