


## TA9090-AA-2424

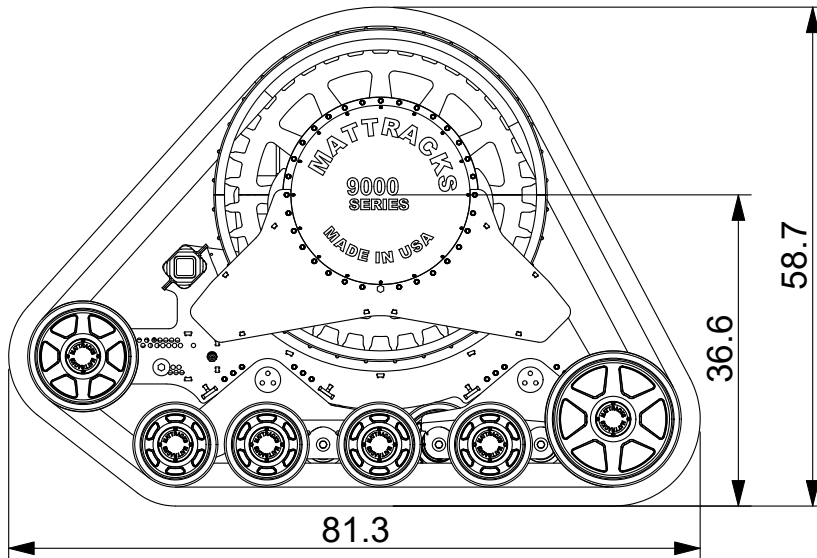

<b>EXCLUSIVE ANTI-TORQUE SYSTEM</b>	Rubber Torsion
<b>FRAME CONSTRUCTION</b>	Steel
<b>RECOMMENDED MAX GROSS</b>	35,000 lbs
<b>ASSEMBLY WEIGHT</b>	9,400 lbs
<b>INTERNAL SUSPENSION</b>	Concentric Pivot, w/ Independent Offset Rocker Arm
<b>TRACK TREAD WIDTH</b>	24 in
<b>TREAD STYLE</b>	All-Terrain, Self-Cleaning
<b>TRACK MATERIAL</b>	Rubber with Internal Composite Rods/Cord
<b>RECOMMENDED OPERATING TEMPERATURE</b>	(Ambient) -40° to +130°
<b>AXLE HEIGHT</b>	36.6 in
<b>GROUND CONTACT LENGTH</b>	(Hard Surface) - 53.3 in min (Soft Surface) - 85 in max
<b>GROUND CONTACT SURFACE AREA</b>	(Hard Surface) - 5,120 in <sup>2</sup> min (Soft Surface) - 8,160 in <sup>2</sup> max
<b>CORNERS</b>	4
<b>GROUND PRESSURE*</b>	4 to 7 psi
<b>SPROCKET DIAMETER</b>	38.6 in
<b>WHEELS (SHIELDED &amp; SEALED BEARING)</b>	(12) 2.5"x10", (2) 2.5"x16", (2) 2.5"x13" Heavy Duty, Industrial Seals (16/corner, 3 rows)
<b>RECOMMENDED MAX SPEED**</b>	15 mph
<b>TURNING RADIUS</b>	Same as original vehicle
<b>MAX OPERATING SIDE SLOPE (GRADE)*</b>	25%
<b>TERRAIN</b>	All-Terrain Including Hard Surface at GVW
<b>MAX DISTANCE OFF-ROAD</b>	Indefinite
<b>MAX DISTANCE HARD SURFACE**</b>	At Below 80°F (26°C): Indefinite
<b>AT ABOVE 80°F (26°C)</b>	15 Miles at Max Speed

\*DEPENDING ON VEHICLE, CARGO, AND ACCESSORIES \*\*SOME VEHICLES MAY REQUIRE SLIGHT ALTERATIONS  
ALL SPECIFICATIONS ARE APPROXIMATE AND WE RESERVE THE RIGHT TO MAKE CHANGES OR MODIFICATIONS WITHOUT NOTIFICATION