


MATTRACKS SALES, INC

MATTRACKS  
**Track-Tor-Assist™ 6000**  
4 WD & FRONT ASSIST TRACTORS

Custom designed to fit most 4 wheel drive and front wheel assist tractors up to 100 HP.



Retains 4 WD status w/tracks

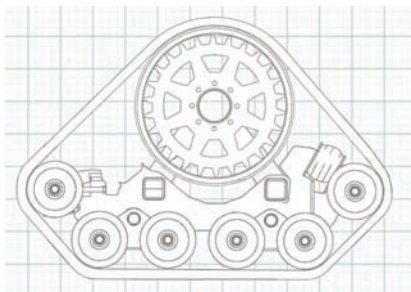

NOTE: Certain tractors may require some trimming of tractor body parts.

\*Depending on vehicle \*\*For maximum tread life  
\*\*\*Some vehicles may require slight alterations.

ALL SPECIFICATIONS ARE APPROXIMATE, YOUR VEHICLE'S PERFORMANCE MAY DIFFER. WE RESERVE THE RIGHT TO MAKE CHANGES OR MODIFICATIONS WITHOUT NOTIFICATION

3-22-10 Copyright Mattracks Sales, Inc., Karlstad, MN

### SPECIFICATIONS

Exclusive Anti-Torque System	.....	Rubber Torsion - Anti Torque
Frame Construction	.....	Structural Steel
Type of Vehicle***	.....	4 wheel drive/front assist tractors
Recommended Max. Gross Wt.	.....	14,250 lbs. (6,464 kg) GVW
		Ft. 5,750 lbs. (2,608 kg), Rr. 8,500 lbs. (3,855 kg)
Internal Suspension	.....	Ft. - Concentric Pivot w/ Rocker Arm, Rr. - Concentric Pivot w/ Rocker Arm, Air Ride Pneumatic
		(Smooth ride with minimum change to track tension, resulting in minimal heat buildup)
Track Tread Width	.....	Ft. 16 in. (406 mm) Rr. 18 in. (457 mm)
Tread Style	.....	All-Terrain, Self-Cleaning Lug, Quiet, Highly Efficient
Track Material	.....	Specially Formulated Rubber Compound with Internal Reinforced Composites
Overall Width (Outside to outside of tracks)	.....	Depends on tractor model
Recommended Operating Temperature	.....	(Ambient) -38° F to +130° F (-40° C to +55° C)
Ground Contact Length [typical]:		
(Hard Surface)	.....	Front 33 in. / Rear 41 in. (Front 838 mm / Rear 1,041 mm)
(Soft Surface)	.....	Front 51 in. / Rear 56 in. (Front 1,295 mm / Rear 1,422 mm)
Ground Contact Surface Area	.....	2,532 sq. in. min. (16,335 sq. cm min.) 3,712 sq. in. max. (23,948 sq cm max.)
Gear-Reduction	.....	.25 to 50% depending on original tire size.
Wheels (Double Shielded & Sealed Bearing)	.....	8 in. x 2.5 in. HD extra seals (8 Front, 12 Rear /corner) (203 mm x 63.5 mm)
Wheel Material	.....	UHMW and Rubber
Paint (color)	.....	Yellow-Standard Optional: Other colors, E Coat Corrosion, Resistance

### PERFORMANCE

Recommended Max. Speed**	.....	20 mph (30 km/h)
Turning Radius	.....	Same as original vehicle
Approach Angle*	.....	Up to 90°
Departure Angle*	.....	Up to 80°
Grade Capacity*	.....	100%
Side Slope Capacity	.....	68%
Terrain - All Terrain Including Hard Surface	.....	at 14,250 lbs. (6,464 kg) GVW
Maximum Distance Off Road	.....	Indefinite
Maximum Distance Hard Surface**	.....	at Below 80°F (26°C) and light GVW: Indefinite at Above 80°F (26°C) and light GVW: 15 miles at 20 mph (25 km at 30 km/h) at Above 80°F (26°C) at GVW: 5 mile at 20 mph (8 km at 30 km/h)