

MATTRACKS SALES, INC


MATTRACKS
Model M3 UR HD
 HEAVY DUTY FEATURING M3 TREAD

Designed for Utility All Terrain Vehicles



New! Track Tension Indicator

New! Split sprocket for easy track service.

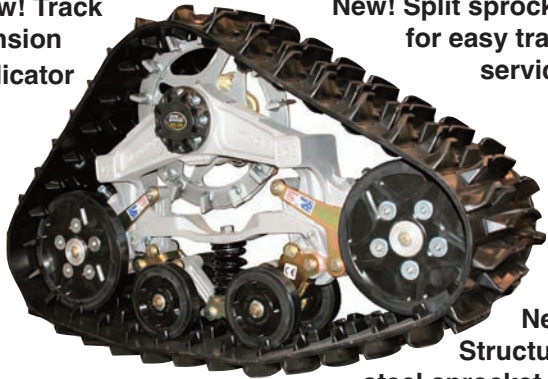

New! Structural steel sprocket for added durability



*Depending on vehicle, cargo, and accessories.

**For maximum tread life

***Some vehicles may require slight alterations.

ALL SPECIFICATIONS ARE APPROXIMATE AND WE RESERVE THE RIGHT TO MAKE CHANGES OR MODIFICATIONS WITHOUT NOTIFICATION

2009 Copyright Mattracks, Inc., Karlstad, MN

SPECIFICATIONS

| | | |
|---------------------------------------|-------|---|
| Exclusive Anti-Torque System | | Rubber Torsion - Anti Torque |
| Assembly Weight | | Approx. 628 lbs @ 157 ea. (285 kg @ 71 ea.) |
| Type of Vehicle*** | | 4 Wheel Drive ATVs |
| Recommended Max Gross Wt. | | 4,200 lbs. (1,905 kg) |
| Internal Suspension | | Adjustable four link, heavy duty quad spring Shape Changing Suspension (SCS) for extra-smooth ride. |
| Track Tread Width | | .13 in. (330 mm) |
| Tread Style | | .1 3/4 in. (44 mm) lugs (All-Terrain Self-Cleaning Paddle) |
| Track Material | | Rubber with Heavy Duty Internal Composite Rods and Heavy Duty Cord |
| Recommended Operating Temperature | | (Ambient) -40°F to +130°F (-40°C to + 55°C) |
| Increase Ground Clearance* | | 6 in. (152 mm) |
| Ground Contact Length (approx.): | | |
| (Hard Surface) | | .30 in. min. (762 mm) |
| (Soft Surface) | | .42 in. max. (1,067 mm) |
| Ground Contact Surface Area (approx.) | | 1,560 sq. in. min. (10,062 sq. cm min.) 2,184 sq. in. max. (14,087 sq. cm max.) |
| Ground Pressure* | | Less than 1/2 psi (3.4 kPa) on some ATVs |
| Sprocket Diameter/Material | | .13 7/8 in. (352 mm) Structural Steel |
| Gear-Reduction | | .1/3 Increase in Gear Reduction on Vehicle with Typical OEM ATV Tire |
| Wheels (Shielded & Sealed Bearing) | | .8 wheels per corner, 2 rows |
| Wheel Material | | .Heavy Duty UHMW & Rubber with Aluminum Hubs |
| Color | | .Natural Aluminum - Standard Camouflage Colors - "Optional" |

NOTE: Mattracks offers a running board fender protector, which acts as a fender and foot guard saver, to protect the track lugs, foot guard and inside fender from occasional track contact. The skid plate style running board will be required on most installations to protect the track and ATV fenders from damage.

About LiteFoot's Exclusive SCS System

The exclusive Shape Changing Suspension (SCS). This adjustable suspension allows for a larger or smaller footprint, changing the approach angle of the leading edge of the tracks for better "lift" in softer conditions. Suspension automatically adjusts approach and departure angle when encountering obstacles, without effectively changing track tension.