


200M1-A1-SM

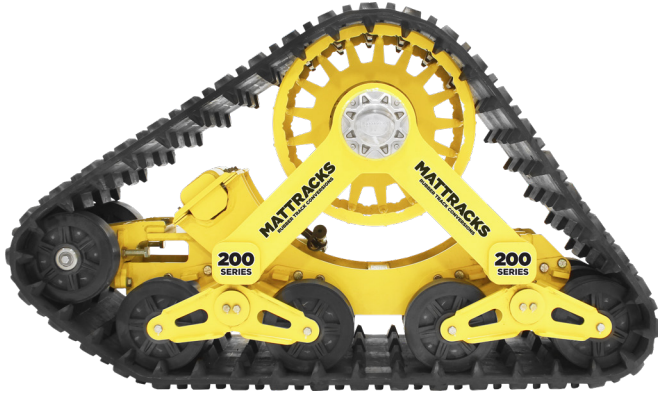

SPECIFICATIONS	Front	Rear
TYPE OF VEHICLE	Extra Heavy Duty (ex. Ford F-550, GMC C5500)	
RECOMMENDED MAX GVW	21,000 lbs	
RECOMMENDED MAX SPEED	40 mph	
FRAME CONSTRUCTION	Steel	
STEERING ASSIST UPGRADE (adds 25 lbs)	Yes	
ASSEMBLY WEIGHT	495 lbs	1,130 lbs
INTERNAL SUSPENSION	Concentric Pivot with Independent Offset Rocker Arm	
TRACK TREAD WIDTH	18"	
TRACK TREAD STYLE	All-Terrain, Self-Cleaning	
TRACK MATERIAL	Specially Formulated Rubber Compound with Internal Reinforced Composites	
RECOMMENDED OPERATING TEMP	(Ambient) -40° to +130°	
AXLE HEIGHT	23"	24.5"
GROUND CONTACT LENGTH	(Hard Surface) 36" (Soft Surface) 55"	(Hard Surface) 61" (Soft Surface) 79"
GROUND CONTACT SURFACE AREA	738 in ² min / 1,134 in ² max	1,098 in ² min / 1,710 in ² max
SPROCKET DIAMETER	22"	
WHEELS TYPE	8" x 2.25"	
ROAD WHEELS COUNT	12, 3 rows	18, 3 rows
WHEEL MATERIAL	UHMW / Rubber	
PAINT COLOR	Yellow (Standard, other colors available)	

ALL SPECS ARE PER CORNER

*DEPENDENT ON VEHICLE, CARGO, AND ACCESSORIES **SOME VEHICLES MAY REQUIRE SLIGHT ALTERATIONS
ALL SPECIFICATIONS ARE APPROXIMATE AND WE RESERVE THE RIGHT TO MAKE CHANGES OR MODIFICATIONS WITHOUT NOTIFICATION